


Flexible UHF Metal Tag

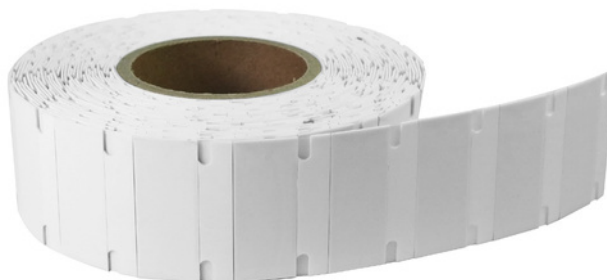


Functional Specifications:



RFID Protocol:	EPC Class1 Gen2, ISO18000-6C
Frequency:	(US) 902-928MHZ
IC type:	Ucode-8
Memory:	EPC 128bits, User 0bits, TID 96bits
Write Cycles:	100,000 Times
Functionality:	Read/write
Data Retention:	50 Years
Applicable Surface:	Metal Surfaces + non metal surface
Read Range :	4.5m, On metal 4.5m, Off metal
(Fix Reader)	2.8m, On metal
Read Range :	1.4m, Off metal
(Handheld Reader)	
Warranty:	1 Year

Physical Specification:

Size:	60.0x25.0mm
Thickness:	1.0mm
Material:	Foam
Colour:	White (Customizable color printing)
Mounting Methods:	Adhesive
Weight:	1.5g
Recommended Printer:	Zebra R110Xi4 / Postek TX3R / SATO CL4NX

Dimensions:

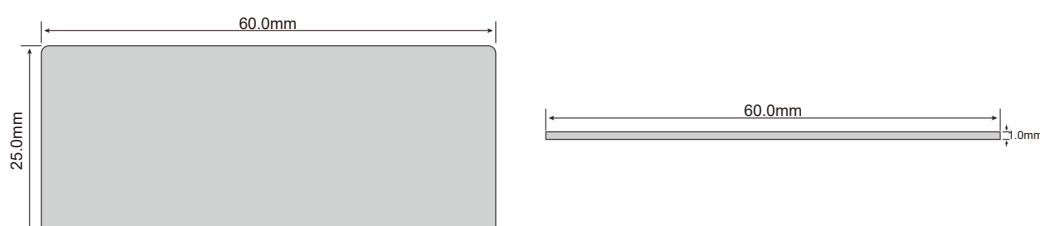

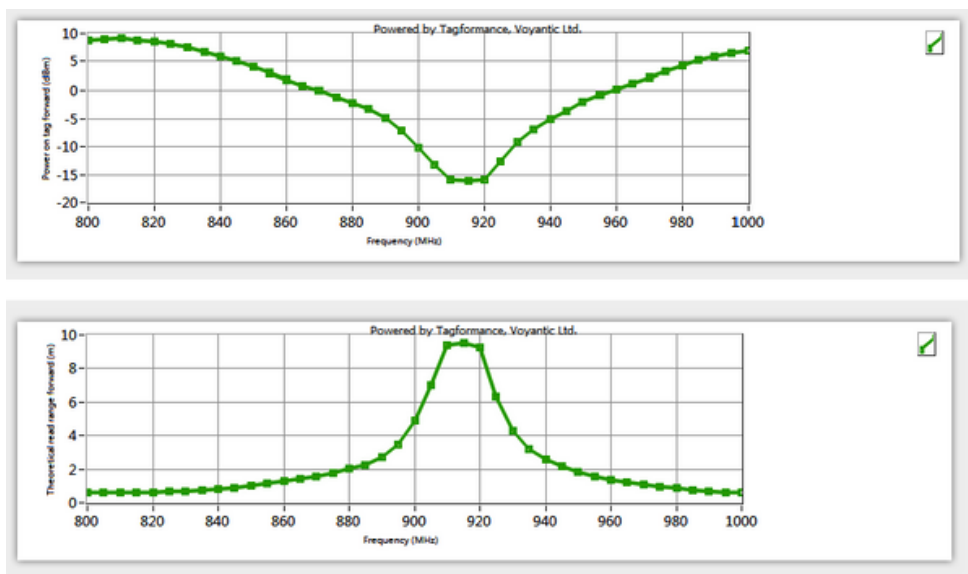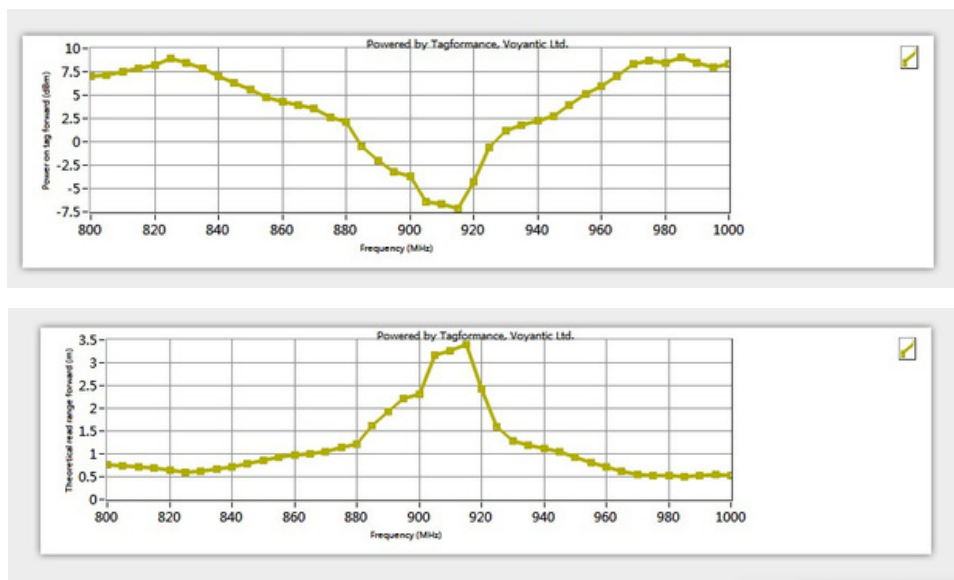JFLE6025 (On metal) :**JFLE6025 (Off metal) :****Environmental Specification:**

IP Rating: IP57

Temperature: -20 ~ 85°C

Certifications: Reach Approved, RoHS Approved, CE Approved